

NOBLELIFT

//2018.04

MODEL RANGE



Powered Pallet Trucks / Powered Stackers










NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD

www.noblelift.com

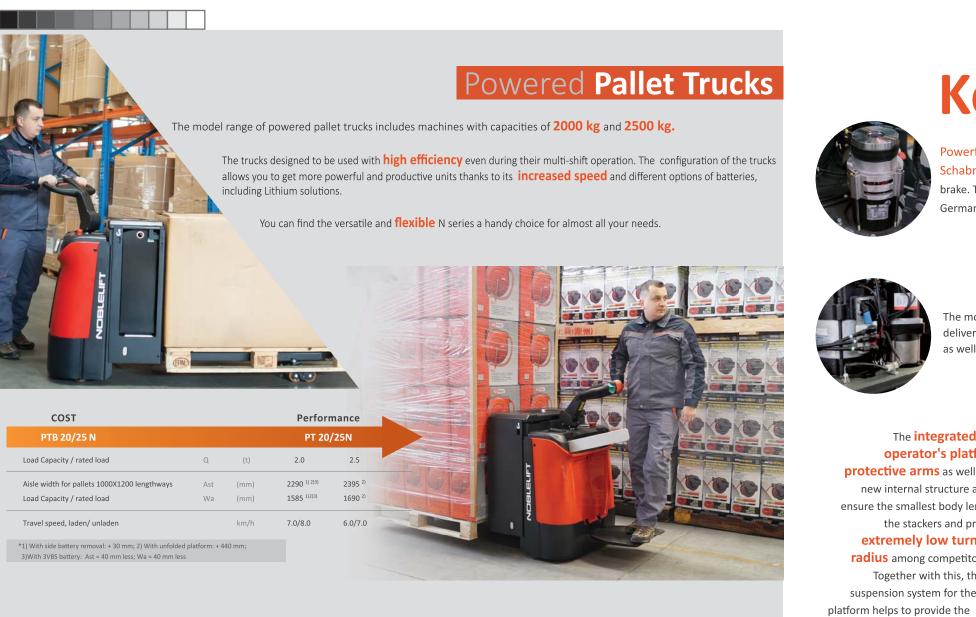

Powered **Stackers**

The range of stackers includes the wide list of models with capacity from 1200 kg to 2000 kg and lifting height up to 5500 mm.

One of the key features of stacker range lies in the **compact design** and **structure:** who else can provide the similar configuration with the same maneuverability?

Four point structure allows to reduce the width of truck without sacrificing its stability and residual capacity. New model range of stackers can go through narrow aisles without any problem.

There is no doubt that our customers can enjoy comfort of operation in tight areas and improved speed on long distances with these models.

COST			ı	Performance		
PSB 12/16/20N			PS 12/16/20N			
Load Capacity / rated load	Q	(t)	1.2	1.6	2.0	
Lift height(up to)	h3+h13	(mm)	3600	5500	4600	
Aisle width for pallets 800X1200 lengthways	Ast	(mm)	2250 ¹⁾	2290 ¹⁾	2420 1)	
Turning radius	Wa	(mm)	1380 1)	1420 1)	1550 ¹⁾	
Travel speed, laden/ unladen		km/h	7.0/8.0	7.0/8.0	6.0/7.0	
*1) With unfolded platform: + 440 mm						





The integrated design of operator's platform and

protective arms as well as totally

ensure the smallest body length of

extremely low turning

Together with this, the

radius among competitors.

suspension system for the

high level of comfort to

new internal structure allows to

the stackers and provide

Powerful AC-drive unit from the global industry leaders: the AC driving motor designed and produced by Schabmuller comes together with the top quality ZF gearbox and it is equipped with Intorq electromagnetic brake. The drive unit can provide the drive speed up to 8 km/h. The use of top level quality drive wheels from German manufacturers Rader Vogel or Wicke helps to ensure the long life time of PU tires.

The driving controllers and steering controllers are manufactured by Zapi (Italy) - the leading European brand with long history in the industry, which provides extremely reliable and flexible solutions with high performance level of the control system.

The model range can be equipped with the option of Electric Power Steering (EPS) which delivers precise and fast control for the position of steering wheel and has a high level of reliability as well as safety according to official standards.

> Rema tiller delivers high level of ergonomics as well as reliability of control system. In addition, the tiller ensures a long life-time thanks to the contactless rocker switches designed for lifting/lowering function



OPTIONS AND **FLEXIBILITIES**

> The option of PIN-code panel access, which works not only with PIN-code but also with access cards (RFID) , can significantly simplify the procedure of access limitation for the fleet which may be used by more

> The **option of built-in charger** may help to simplify charging processes for the customers using the trucks not so intensively (without multi-shift operation connected with necessity of battery replacement)

The option of side battery replacement allows customers to use the truck with multi-shift **operation** and not to waste time on complicated procedure of battery replacement through the top. With help of specially designed trolley, the batteries can be replaced fast and effortlessly.



POWERED STACKERS

The trucks can be equipped with the **option of Aquamatic**- the system of fast refilling of distilled VBS standard, which helps to reduce the length of the original truck and makes it more compact (the

The model range can be equipped with Lithium batteries. The use of lithium solution from Noblelift will allow you to enjoy benefits of Lithium technology such as Fast charging, Opportunity charging, Maintenance free, Environmental-friendly, Smart Diagnosis of battery status, Lower cost of Total Ownership with long service life.



The feature of **proportional hydraulic***

control realized with help of solution from the

top leading manufacturer of hydraulic solutions

HPI allows to ensure precise positioning of forks

during lifting and lowering as well as to provide

handling of fragile goods.

*For PS xx N only

smooth acceleration/deceleration of forks and gentle

